

An M/M/1 Retrial Queue with Unreliable Server under Fuzzy Environment

¹ S. Shanmugasundaram and B.Venkatesh^{2*}

¹ Department of Mathematics, Government Arts College, Salem-7, India

² Department of Mathematics, Sona College of Technology, Salem-5, India

Abstract

An M/M/1 retrial queueing system with breakdowns have been studied in fuzzy environment. We study the membership functions of the system characteristics of this queueing model. The arrival rate, retrial rate, service rate, failure rate and repair rate of server are all fuzzy numbers. using Zadeh's extension principle, alpha cut approach and parametric non-linear programming. For this model we obtain some system characteristics such as, mean orbit size, mean normal queue size and mean system size. The α cut approach is used to transform fuzzy queues with an unreliable server to a family of crisp retrial queues with unreliable server. By means of the membership functions of the system characteristics, a set of parametric nonlinear programme is developed to describe the family of crisp queues with an unreliable server. Numerical example is also illustrated.

Keywords: Retrial queue, Breakdowns, Parametric Programming, Membership functions
2010 Mathematics Subject Classification: 60K25, 03E72

1 Introduction

Queueing models have wider applications in service organizations as well as manufacturing firms, in that various types of customers are serviced by various types of servers according to specific queue discipline [4]. However, in many real-life situations the server may experience unpredictable breakdowns. Therefore, queueing models with server breakdowns provide a realistic representation of such systems.

In traditional queueing theory, the inter arrival times, service times and inter retrial times are assumed to follow certain probability distributions with fixed parameters. But, in real life in many situations the parameter may only be characterized subjectively, that is, the system parameters are both possibilistic and probabilistic. Thus fuzzy analysis would be potentially much more useful and realistic than the commonly used crisp concepts.

Li and Lee [10] investigated analytical results for two fuzzy queues using a general approach based on Zadeh's extension principle. Negi and Lee [14] proposed a procedure using α -cut and two variable simulation to analyze fuzzy queues. Using parametric programming Kao et al. [11] constructed the membership functions of system characteristics for fuzzy queues. A queueing model with unreliable server under fuzzy environment done by Ke.J.C et.al [19]. Santhakumaran.A and Shanmugasundaram.S [7] proposed a Single server retrial queue in Bernoulli schedule with feedback on non-retrial Customers. Shanmugasundaram.S and Venkatesh.B [21] discussed multi-server fuzzy queueing model using DSW algorithm.

2 Description of the system

The basic queueing model of this paper is M/M/1 retrial queue with unreliable server. Customers join the retrial orbit if and only if they are interrupted by server breakdown. Retrial customers do not join the normal

*Corresponding Author: ²venkatbvs11@gmail.com, ¹sundaramsss@hotmail.com

queue, but rather attempt to access the server directly at random intervals independently of arrivals or other retrial customers. However these interrupted customers can access to the server only when it is operational and idle and repeat service until they have been successfully processed. We allow for both active breakdowns which occur during a service cycle and idle breakdowns which occur while the server is not failed but idle. The server may not breakdown while under repair.

In this work, we have used five fuzzy variables, namely the fuzzified exponential arrival rate, retrial rate, service rate, failure rate and repair rate. Through the α cuts and Zadeh's extension principle [9], we transform fuzzy queues with unreliable server to a family of crisp retrial queues with unreliable server. As α value varies, the family of crisp queues are then described and solved by parametric nonlinear programming (NLP). The solutions from NLP completely and successfully derive the membership functions of the system characteristics. The remainder of this paper is composed as follows: Section 2 describe the basic queueing model and section 3 gives and crisp queue results. In section 4, a mathematical programming approach is discussed for deriving the membership functions of these system characteristics. A numerical example is given in section 5. Conclusions are drawn in section 6.

3 Crisp queue results

We consider a queueing model M/M/1 retrial queue with unreliable server. The system characteristics of interest are mean orbit size $E[R]$, normal queue size $E[Q]$ and system size $E[N]$.

The stability condition for retrial queue with unreliable server is:

$$\rho = \frac{\lambda(\sigma + \beta)}{\beta\eta}$$

(i) Probability that the server is idle (p_I)

$$p_I = \frac{\beta}{\beta + \sigma} - \frac{\lambda}{\eta} \tag{3.1}$$

(ii) Probability that the server is failure (p_F)

$$p_F = \frac{\sigma}{\beta + \sigma} \tag{3.2}$$

(iii) Probability that the server is busy (p_B)

$$p_B = \frac{\lambda}{\eta} \tag{3.3}$$

$$E[R] = \frac{\beta\lambda\sigma[\gamma(\gamma + \sigma - \lambda) + \lambda(\beta + \sigma)]}{\gamma[\beta\gamma - \lambda(\beta + \sigma)][\beta(\gamma + \sigma) - \lambda(\beta + \sigma)]} + \frac{\lambda\sigma[\beta + \sigma]}{\theta[\beta\gamma - \lambda(\beta + \sigma)]} \tag{3.4}$$

$$E[Q] = \frac{\lambda[\gamma\sigma(\gamma + \sigma) + \lambda(\beta + \sigma)^2]}{\gamma(\beta + \sigma)[\beta(\gamma + \sigma) - \lambda(\beta + \sigma)]} \tag{3.5}$$

$$E[N] = \frac{\lambda[\gamma\sigma + (\beta + \sigma)^2]}{(\beta + \sigma)[\beta\gamma - \lambda(\beta + \sigma)]} + \frac{\sigma\lambda(\beta + \sigma)}{\theta[\beta\gamma - \lambda(\beta + \sigma)]} \tag{3.6}$$

4 Fuzzy retrial queue with an unreliable server

To ensure that the above system has wider applications, we extend it to the fuzzy environment. Suppose the arrival rate λ , retrial rate θ service rate γ , failure rate σ , repair rate β are approximately known and can be represented by the fuzzy sets $\lambda, \theta, \gamma, \sigma, \beta$ respectively.

Let $\mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v)$ denote the membership functions of $\lambda, \theta, \gamma, \sigma, \beta$ respectively. Then we have the following fuzzy sets.

$$\tilde{\lambda} = \{x, \mu_{\tilde{\lambda}}(x), x \in X\}$$

$$\tilde{\theta} = \{r, \mu_{\tilde{\theta}}(r), r \in R\}$$

$$\tilde{\gamma} = \{s, \mu_{\tilde{\gamma}}(s), s \in S\}$$

$$\tilde{\sigma} = \{u, \mu_{\tilde{\sigma}}(u), u \in U\}$$

$$\tilde{\beta} = \{v, \mu_{\tilde{\beta}}(v), v \in V\}$$

where X,R,S,U,V are crisp universal sets of arrival rate, retrial rate, service rate, failure rate, repair rate respectively. Let $f(x,r,s,u,v)$ denote the system characteristics of interest. Since $\lambda, \theta, \gamma, \sigma, \beta$ are fuzzy numbers, $f(\lambda, \theta, \gamma, \sigma, \beta)$ is also a fuzzy number. Based on Zadeh's extension principle [9], the membership function of the system characteristic $f(\tilde{\lambda}, \tilde{\theta}, \tilde{\gamma}, \tilde{\sigma}, \tilde{\beta})$ is defined as

$$\mu_{f(\tilde{\lambda}, \tilde{\theta}, \tilde{\gamma}, \tilde{\sigma}, \tilde{\beta})} = \sup_{x \in X, r \in R, s \in S, u \in U, v \in V} \{ \min \{ \mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v) \} / z = f(x, r, s, u, v) \} \quad (4.1)$$

Assume that the system characteristic of interest are expected number of customers in orbit $E[R]$, mean normal queue size $E[Q]$, and expected number of customers in the system $E[N]$.

From equations (2.1) and (3.1) the membership function of p_I is

$$\mu_{\tilde{p}_I}(z) = \sup \{ \min \{ \mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v) \} / z = \frac{v}{v+u} - \frac{x}{s} \} \quad (4.2)$$

similarly from equations (2.2) and (3.1), the membership function of p_F is

$$\mu_{\tilde{p}_F}(z) = \sup \{ \min \{ \mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v) \} / z = \frac{u}{u+v} \} \quad (4.3)$$

Now from equations (2.3) and (3.1), the membership function of p_B is

$$\mu_{\tilde{p}_B}(z) = \sup \{ \min \{ \mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v) \} / z = \frac{x}{s} \} \quad (4.4)$$

From (2.4) and (3.1), the membership function of $E[R]$ is

$$\mu_{E[R]}(z_1) = \sup \{ \min \{ \mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v) \} / z_1 \} \quad (4.5)$$

where $z_1 = \frac{xuv[s(s+u-x)+x(u+v)]}{s[vs-x(u+v)][v(s+u)-x(u+v)]} + \frac{ux[u+v]}{r[vs-x(u+v)]}$

From (2.5) and (3.1), the membership function of $E[Q]$ is

$$\mu_{E[Q]}(z_2) = \sup \{ \min \{ \mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v) \} / z_2 = \frac{x[us(s+u)+x(u+v)^2]}{s(u+v)[v(s+u)-x(u+v)]} \} \quad (4.6)$$

From equations (2.6) and (3.1), the membership function of $E[N]$ is

$$\mu_{E[N]}(z_3) = \sup \{ \min \{ \mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v) \} / z_3 = \frac{x[su+(u+v)^2]}{(u+v)[sv-x(u+v)]} + \frac{ux(u+v)}{r[vs-x(u+v)]} \} \quad (4.7)$$

The membership functions in (3.2), (3.3), (3.4), (3.5), (3.6), (3.7) are not in the usual forms for practical use and making it very difficult to imagine their shapes.

In this paper we approach the problem using a mathematical programming technique. These parametric nonlinear programs are developed to find the α cuts of $f(\lambda, \theta, \gamma, \sigma, \beta)$ based on the extension principle.

5 The parametric nonlinear programming approach

One approach is to construct the membership function $\mu_{f(\tilde{\lambda}, \tilde{\theta}, \tilde{\gamma}, \tilde{\sigma}, \tilde{\beta})}$ by deriving the α -cuts of $\mu_{f(\tilde{\lambda}, \tilde{\theta}, \tilde{\gamma}, \tilde{\sigma}, \tilde{\beta})}$. The α -cuts of $\lambda, \theta, \gamma, \sigma, \beta$ are defined respectively as follows.

$$\lambda(\alpha) = \{x \in X / \mu_{\tilde{\lambda}}(x) \geq \alpha\} \quad (5.1)$$

$$\theta(\alpha) = \{r \in R / \mu_{\tilde{\theta}}(r) \geq \alpha\} \quad (5.2)$$

$$\gamma(\alpha) = \{s \in S / \mu_{\tilde{\gamma}}(s) \geq \alpha\} \quad (5.3)$$

$$\sigma(\alpha) = \{u \in U / \mu_{\tilde{\sigma}}(u) \geq \alpha\} \quad (5.4)$$

$$\beta(\alpha) = \{v \in V / \mu_{\tilde{\beta}}(v) \geq \alpha\} \quad (5.5)$$

The fuzzy arrival rate $\tilde{\lambda}$, fuzzy retrial rate $\tilde{\theta}$, fuzzy service rate $\tilde{\gamma}$, fuzzy failure rate $\tilde{\sigma}$, fuzzy repair rate $\tilde{\beta}$ of the queueing system are fuzzy numbers. Therefore the α level sets of $\tilde{\lambda}, \tilde{\theta}, \tilde{\gamma}, \tilde{\sigma}, \tilde{\beta}$ defined in equations (4.1 - 4.5) are crisp intervals which can be expressed in the following forms.

$$\lambda(\alpha) = [x_L, x_U] = [\min_{x \in X} \{x / \mu_{\tilde{\lambda}}(x) \geq \alpha\}, \max_{x \in X} \{x / \mu_{\tilde{\lambda}}(x) \geq \alpha\}] \quad (5.6)$$

$$\theta(\alpha) = [r_L, r_U] = [\min_{r \in R} \{r / \mu_{\tilde{\theta}}(r) \geq \alpha\}, \max_{r \in R} \{r / \mu_{\tilde{\theta}}(r) \geq \alpha\}] \quad (5.7)$$

$$\gamma(\alpha) = [s_L, s_U] = [\min_{s \in S} \{s / \mu_{\tilde{\gamma}}(s) \geq \alpha\}, \max_{s \in S} \{s / \mu_{\tilde{\gamma}}(s) \geq \alpha\}] \quad (5.8)$$

$$\sigma(\alpha) = [u_L, u_U] = [\min_{u \in U} \{u / \mu_{\tilde{\sigma}}(u) \geq \alpha\}, \max_{u \in U} \{u / \mu_{\tilde{\sigma}}(u) \geq \alpha\}] \quad (5.9)$$

$$\beta(\alpha) = [v_L, v_U] = [\min_{v \in V} \{v / \mu_{\tilde{\beta}}(v) \geq \alpha\}, \max_{v \in V} \{v / \mu_{\tilde{\beta}}(v) \geq \alpha\}] \quad (5.10)$$

Fuzzy queues reduces to a family of crisp queues with deterministic inter arrival time, retrial time, service time, failure rate and repair rate for different α level sets. $\{\lambda(\alpha), 0 < \alpha \leq 1\}, \{\theta(\alpha), 0 < \alpha \leq 1\}, \{\gamma(\alpha), 0 < \alpha \leq 1\}, \{\sigma(\alpha), 0 < \alpha \leq 1\}, \{\beta(\alpha), 0 < \alpha \leq 1\}$

$$x_{\alpha}^L = \min \mu_{\tilde{\lambda}}^{-1}(\alpha), x_{\alpha}^V = \max \mu_{\tilde{\lambda}}^{-1}(\alpha) \quad (5.11)$$

$$r_{\alpha}^L = \min \mu_{\tilde{\theta}}^{-1}(\alpha), r_{\alpha}^V = \max \mu_{\tilde{\theta}}^{-1}(\alpha) \quad (5.12)$$

$$s_{\alpha}^L = \min \mu_{\tilde{\gamma}}^{-1}(\alpha), s_{\alpha}^V = \max \mu_{\tilde{\gamma}}^{-1}(\alpha) \quad (5.13)$$

$$u_{\alpha}^L = \min \mu_{\tilde{\sigma}}^{-1}(\alpha), u_{\alpha}^V = \max \mu_{\tilde{\sigma}}^{-1}(\alpha) \quad (5.14)$$

$$v_{\alpha}^L = \min \mu_{\tilde{\beta}}^{-1}(\alpha), v_{\alpha}^V = \max \mu_{\tilde{\beta}}^{-1}(\alpha) \quad (5.15)$$

The α cut approach can be used to develop the membership functions. Based on Zadeh's extension principle $\mu_{\tilde{A}}(I)$ is the supremum and minimum over

$\{\mu_{\tilde{\lambda}}(x), \mu_{\tilde{\theta}}(r), \mu_{\tilde{\gamma}}(s), \mu_{\tilde{\sigma}}(u), \mu_{\tilde{\beta}}(v)\}$ \tilde{A} is any performance measures of interest and $z=f(x,r,s,u,v)$ satisfying $\mu_{\tilde{A}}(z) = \alpha, 0 < \alpha \leq 1$ The following five cases :

case (i): $(\mu_{\tilde{\lambda}}(x) = \alpha, \mu_{\tilde{\theta}}(r) \geq \alpha, \mu_{\tilde{\gamma}}(s) \geq \alpha, \mu_{\tilde{\sigma}}(u) \geq \alpha, \mu_{\tilde{\beta}}(v) \geq \alpha)$

case (ii): $(\mu_{\tilde{\lambda}}(x) \geq \alpha, \mu_{\tilde{\theta}}(r) = \alpha, \mu_{\tilde{\gamma}}(s) \geq \alpha, \mu_{\tilde{\sigma}}(u) \geq \alpha, \mu_{\tilde{\beta}}(v) \geq \alpha)$

case (iii): $(\mu_{\tilde{\lambda}}(x) \geq \alpha, \mu_{\tilde{\theta}}(r) \geq \alpha, \mu_{\tilde{\gamma}}(s) = \alpha, \mu_{\tilde{\sigma}}(u) \geq \alpha, \mu_{\tilde{\beta}}(v) \geq \alpha)$

case (iv): $(\mu_{\tilde{\lambda}}(x) \geq \alpha, \mu_{\tilde{\theta}}(r) \geq \alpha, \mu_{\tilde{\gamma}}(s) \geq \alpha, \mu_{\tilde{\sigma}}(u) = \alpha, \mu_{\tilde{\beta}}(v) \geq \alpha)$

case (v): $(\mu_{\tilde{\lambda}}(x) \geq \alpha, \mu_{\tilde{\theta}}(r) \geq \alpha, \mu_{\tilde{\gamma}}(s) \geq \alpha, \mu_{\tilde{\sigma}}(u) \geq \alpha, \mu_{\tilde{\beta}}(v) = \alpha)$

The non-linear programming technique gives the lower and upper bounds of α cuts $\mu_{\tilde{A}}$ for case(i) as

$$(z)_{\alpha}^{L_1} = \min_{\Omega} \{f(x, r, s, u, v)\}$$

$$(z)_{\alpha}^{U_1} = \max_{\Omega} \{f(x, r, s, u, v)\}$$

Ω is the set defining the ranges of values of the variables x,r,s,u,v.

Similarly we calculate the lower and upper bounds of α cuts of $\mu_{\tilde{A}}$ for case (ii),(iii),(iv),(v) such that $x_{\alpha}^L \leq x \leq x_{\alpha}^U, y_{\alpha}^L \leq y \leq y_{\alpha}^U$ The crisp interval $[(z)_{\alpha}^L, (z)_{\alpha}^U]$ represents the α cuts of \tilde{z} , both $(z)_{\alpha}^L$ and $(z)_{\alpha}^U$ are invertible w.r.t α then left shape function $L(z) = (I_L)^{-1}$ and right shape function $R(z) = (I_U)^{-1} \mu_{\tilde{A}}(z)$ can

be written as $\mu_{\tilde{A}}(z) = \begin{cases} L(z), & \text{if } (A)_{\alpha=0}^L \leq I \leq (A)_{\alpha=1}^L ; \\ 1, & \text{if } (A)_{\alpha=1}^L \leq I \leq (A)_{\alpha=1}^U ; \\ R(z), & \text{if } (A)_{\alpha=1}^U \leq I \leq (A)_{\alpha=0}^L. \end{cases}$ Using the above technique the idle probability , failure probability ,busy probability given by the lower and upper bounds of α cuts for $\mu_{\tilde{p}_I}, \mu_{\tilde{p}_F}, \mu_{\tilde{p}_B}$ are

$$(\mu_{\tilde{p}_I})_{\alpha}^L = \min \left\{ \frac{v}{u+v} - \frac{x}{s} \right\}$$

$$(\mu_{\tilde{p}_I})_{\alpha}^U = \max \left\{ \frac{v}{u+v} - \frac{x}{s} \right\}$$

$$(\mu_{\tilde{p}_F})_{\alpha}^L = \min \left\{ \frac{u}{u+v} \right\}$$

$$(\mu_{\tilde{p}_F})_{\alpha}^U = \max \left\{ \frac{u}{u+v} \right\}$$

$$(\mu_{\tilde{p}_B})_{\alpha}^L = \min \left\{ \frac{x}{s} \right\}$$

$$(\mu_{\tilde{p}_B})_{\alpha}^U = \max \left\{ \frac{x}{s} \right\}$$

with $x_{\alpha}^L \leq x \leq x_{\alpha}^U, r_{\alpha}^L \leq r \leq r_{\alpha}^U, s_{\alpha}^L \leq s \leq s_{\alpha}^U, u_{\alpha}^L \leq u \leq u_{\alpha}^U, v_{\alpha}^L \leq v \leq v_{\alpha}^U$ similarly we obtain orbit size, waiting queue size, and system size , by lower and upper bounds of

$$(\mu_{E[\tilde{R}]})_{\alpha}^L = \min_{\Omega} \left\{ \frac{xuv[s(s+u-x) + x(u+v)]}{s[sv-x(u+v)][v(s+u)-x(u+v)]} + \frac{xu(u+v)}{r[sv-x(u+v)]} \right\}$$

$$(\mu_{E[\tilde{R}]})_{\alpha}^U = \max_{\Omega} \left\{ \frac{xuv[s(s+u-x) + x(u+v)]}{s[sv-x(u+v)][v(s+u)-x(u+v)]} + \frac{xu(u+v)}{r[sv-x(u+v)]} \right\}$$

$$(\mu_{E[\tilde{Q}]})_{\alpha}^L = \min_{\Omega} \left\{ \frac{x[su(s+u) + x(u+v)^2]}{s(u+v)[v(s+u)-x(u+v)]} \right\}$$

$$(\mu_{E[\tilde{Q}]})_{\alpha}^U = \max_{\Omega} \left\{ \frac{x[su(s+u) + x(u+v)^2]}{s(u+v)[v(s+u)-x(u+v)]} \right\}$$

$$(\mu_{E[\tilde{N}]})_{\alpha}^L = \min_{\Omega} \left\{ \frac{x[su + (u+v)^2]}{(u+v)[sv-x(u+v)]} + \frac{ux(u+v)}{r[sv-x(u+v)]} \right\}$$

$$(\mu_{E[\tilde{N}]})_{\alpha}^U = \max_{\Omega} \left\{ \frac{x[su + (u+v)^2]}{(u+v)[sv-x(u+v)]} + \frac{ux(u+v)}{r[sv-x(u+v)]} \right\}$$

From which the membership functions of $\mu_{\tilde{p}_I}(z), \mu_{\tilde{p}_F}(z), \mu_{\tilde{p}_B}(z)$ can be constructed as

$$\mu_{\tilde{p}_I}(z) = \begin{cases} L(z), & \text{if } (L_{\tilde{p}_I})_{\alpha=0}^L \leq z \leq (L_{\tilde{p}_I})_{\alpha=1}^L ; \\ 1, & \text{if } (L_{\tilde{p}_I})_{\alpha=1}^L \leq z \leq (L_{\tilde{p}_I})_{\alpha=1}^U ; \\ R(z), & \text{if } (L_{\tilde{p}_I})_{\alpha=1}^U \leq z \leq (L_{\tilde{p}_I})_{\alpha=0}^L. \end{cases}$$

$$\mu_{\tilde{p}_F}(z) = \begin{cases} L(z), & \text{if } (L_{\tilde{p}_F})_{\alpha=0}^L \leq z \leq (L_{\tilde{p}_F})_{\alpha=1}^L ; \\ 1, & \text{if } (L_{\tilde{p}_F})_{\alpha=1}^L \leq z \leq (L_{\tilde{p}_F})_{\alpha=1}^U ; \\ R(z), & \text{if } (L_{\tilde{p}_F})_{\alpha=1}^U \leq z \leq (L_{\tilde{p}_F})_{\alpha=0}^L . \end{cases}$$

$$\mu_{\tilde{p}_B}(z) = \begin{cases} L(z), & \text{if } (L_{\tilde{p}_B})_{\alpha=0}^L \leq z \leq (L_{\tilde{p}_B})_{\alpha=1}^L ; \\ 1, & \text{if } (L_{\tilde{p}_B})_{\alpha=1}^L \leq z \leq (L_{\tilde{p}_B})_{\alpha=1}^U ; \\ R(z), & \text{if } (L_{\tilde{p}_B})_{\alpha=1}^U \leq z \leq (L_{\tilde{p}_B})_{\alpha=0}^L . \end{cases}$$

The membership functions of $\mu_{E[R]}, \mu_{E[Q]}, \mu_{E[N]}$ can be constructed as

$$\mu_{E[R]}(z_1) = \begin{cases} L(z_1), & \text{if } (L_{E[R]})_{\alpha=0}^L \leq (z_1) \leq (L_{E[R]})_{\alpha=1}^L ; \\ 1, & \text{if } (L_{E[R]})_{\alpha=1}^L \leq (z_1) \leq (L_{E[R]})_{\alpha=1}^U ; \\ R(z_1), & \text{if } (L_{E[R]})_{\alpha=1}^U \leq (z_1) \leq (L_{\tilde{E}[R]})_{\alpha=0}^L . \end{cases}$$

$$\mu_{E[Q]}(z_2) = \begin{cases} L(z_2), & \text{if } (L_{E[Q]})_{\alpha=0}^L \leq (z_2) \leq (L_{E[Q]})_{\alpha=1}^L ; \\ 1, & \text{if } (L_{E[Q]})_{\alpha=1}^L \leq (z_2) \leq (L_{E[Q]})_{\alpha=1}^U ; \\ R(z_2), & \text{if } (L_{E[Q]})_{\alpha=1}^U \leq (z_2) \leq (L_{\tilde{E}[Q]})_{\alpha=0}^L . \end{cases}$$

$$\mu_{E[N]}(z_3) = \begin{cases} L(z_3), & \text{if } (L_{E[N]})_{\alpha=0}^L \leq (z_3) \leq (L_{E[N]})_{\alpha=1}^L ; \\ 1, & \text{if } (L_{E[N]})_{\alpha=1}^L \leq (z_3) \leq (L_{E[N]})_{\alpha=1}^U ; \\ R(z_3), & \text{if } (L_{E[N]})_{\alpha=1}^U \leq (z_3) \leq (L_{\tilde{E}[N]})_{\alpha=0}^L . \end{cases}$$

6 Numerical example

If the arrival rate λ , the retrial rate θ , the service rate γ , the failure rate σ , the repair rate β are trapezoidal fuzzy numbers described by $\tilde{\lambda} = [3, 4, 5, 6], \tilde{\theta} = [14, 15, 16, 17], \tilde{\gamma} = [25, 26, 27, 28], \tilde{\sigma} = [36, 37, 38, 39], \tilde{\beta} =$

$[46, 47, 48, 49]$. $\mu_{\tilde{A}}(z)$ can be written as $\mu_{\tilde{A}}(z) = \begin{cases} L(z), & \text{if } (A)_{\alpha=0}^L \leq I \leq (A)_{\alpha=1}^L ; \\ 1, & \text{if } (A)_{\alpha=1}^L \leq I \leq (A)_{\alpha=1}^U ; \\ R(z), & \text{if } (A)_{\alpha=1}^U \leq I \leq (A)_{\alpha=0}^L . \end{cases}$ With the help of

Matlab , we perform α - cuts of arrival rate and service rate and fuzzy expected number of in queue at eleven distinct α levels: 0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1. Crisp intervals for fuzzy expected number of customers in orbit ($E[R]$) at different possibilistic levels are presented in table. Similarly other performance measure such as expected number of customers in queue ($E[Q]$), number of customers in system ($E[N]$) also derived in the table. With the help of MATLAB, we perform α -cuts of fuzzy expected number of customers

Table 1: The α -cuts of $E[R], E[Q], E[N]$

α	$E[R]$	$E[Q]$	$E[N]$
0.0	[0.5695 , 7.9924]	[0.0364 , 0.2466]	[0.6226 , 9.8357]
0.1	[0.6126 , 7.1131]	[0.0393 , 0.2329]	[0.6697 , 8.3270]
0.2	[0.6591 , 6.3495]	[0.0423 , 0.2199]	[0.7203 , 7.1660]
0.3	[0.7091 , 5.6841]	[0.0455 , 0.2076]	[0.7745 , 6.2457]
0.4	[0.7633 , 5.1022]	[0.0488 , 0.1959]	[0.8328 , 5.4990]
0.5	[0.8218 , 4.5917]	[0.0524 , 0.1848]	[0.8954 , 4.8817]
0.6	[0.8854 , 4.1426]	[0.0562 , 0.1744]	[1.0360 , 3.9227]
0.8	[1.0297 , 3.3953]	[0.0644 , 0.1550]	[1.1149 , 3.5437]
0.9	[1.1118 , 3.0840]	[0.0689 , 0.1460]	[1.2004 , 3.2187]
1.0	[1.2015 , 2.8070]	[0.0736 , 0.1376]	[1.2933 , 2.9354]

in the orbit, expected number of customers in the queue, expected number of customers in the system at eleven distinct α values 0,0.1,0.2,0.3,...1.0. Crisp intervals for fuzzy expected number of candidates in

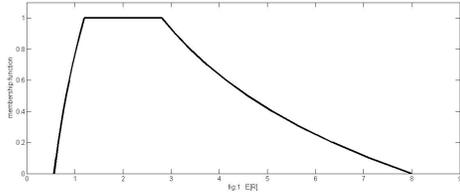


Figure 1: Expected number of customers in orbit $E[R]$

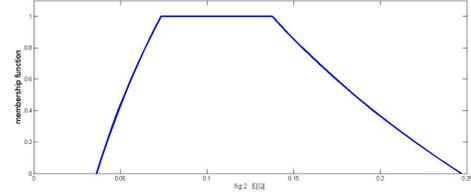


Figure 2: Expected number of customers in queue $E[Q]$

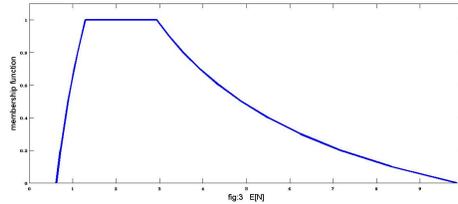


Figure 3: Expected number of customers in system $E[N]$

orbit, expected number of customers in the queue, expected number of customers in the system are presented in Table 1.

The α - cut represent the possibility that these four performance measure will lie in the associated range. Specially, $\alpha = 0$ the range, the performance measures could appear and for $\alpha = 1$ the range, the performance measures are likely to be.

For example, while these four performance measures are fuzzy, the most likely value of $E[R]$ falls between 1.2015 and 2.8070 and its value is impossible to fall outside the range of 0.5695 and 7.9924; it is definitely possible that the expected number of customers in queue $E[Q]$ falls between 0.0736 and 0.1376, and it will never fall below 0.0364 or exceed 0.2466 ;expected number of customers in the system $E[N]$ falls between 1.2933 and 2.9354, and it will never fall below 0.6226 or exceed 9.8357 the The above information will be very useful for designing a queuing system.

7 Conclusion

This paper applied the concept of α -cuts and Zadeh's extension principle to transform a fuzzy queue with an unreliable server into a family of crisp queues that can be described by a set of parametric nonlinear programs(NLP).Due to the complexity of four fuzzy parameters,the closed form for the corresponding membership function can not be explicitly derived by taking the inverse of its α cuts at different possibility levels. Numerical solutions for different α values were calculated to approximate the membership functions by NLP. These results are significant as well as useful for system designers.

References

- [1] Aissani.A, Artalejo J.R, on the single server retrieval queue subject to breakdowns, *Queueing Systems*.30, 309-321,1998.
- [2] Kulkarni.V.G, B.D.Choi, Retrievals queues with server subject to breakdowns and repairs, *Queueing Systems*,7(2), 191-208,1990.
- [3] Takacs.L, A single server queue with feedback, *The Bell System Technical Journal*, 42 ,505-519,1963.

- [4] Gross, D. and Haris, C.M Fundamentals of Queuing Theory, Wiley, New York,1998.
- [5] Nathan P.Sherman,Jeffrey P.Kharoufeh,An $M/M/1$ retrial queue with unreliable server, *operations Research Letters* 34,697-705,2006.
- [6] Santhakumaran and Shanmugasundaram.S, A Single Server Retrial Queue in Bernoulli Schedule With Feedback on Non-Retrial Customers, *Southeast Asian Bulletin of Mathematics* 35, 305-317,2011
- [7] Santhakumaran and Shanmugasundaram.S, Preparatory work on Arrival Customers with a Single Server Feedback Queue,*Information and Management Sciences* 19 (2),301-313,2008.
- [8] Nathan P. Sherman, Jeffrey P.Kharoufeh, An $M/G/1$ Retrial Queue With Unreliable Server for Streaming Multimedia Applications, *Probability in the Engineering and Informational Sciences*, 23, 281-304,2009.
- [9] L.A Zadeh, "Fuzzy sets as a Basis for a Theory of Possibility",*Fuzzy Sets and Systems*, 1, 3-28,1978.
- [10] Li. R.J and Lee.E.S, Analysis of fuzzy queues, *Computers and Mathematics with Applications* 17 (7), 1143 - 1147, 1989
- [11] Chiang Kao, Chang-Chung Li, Chen.S.P, Parametric nonlinear programming to analysis of fuzzy queues, *Fuzzy Sets and Systems*. 107,93-100,1999.
- [12] Timothy Rose , Fuzzy Logic and its applications to engineering, Wiley Eastern,Third Edition 2010
- [13] Chen.S.P, Parametric nonlinear programming approach to fuzzy queues with bulk service , *European Journal Of Operational Research* 163, 434-444,2005.
- [14] Negi. D.S. and Lee. E.S., Analysis and Simulation of Fuzzy Queue, *Fuzzy sets and Systems* 46, 321 - 330,1992.
- [15] Buckely.J.J, Elementary queueing theory based on possibility theory, *Fuzzy and Systems* 37, 43 - 52,1990.
- [16] Chen. S.P, A mathematics programming approach to the machine interference problem with fuzzy parameters, *Applied Mathematics and Computation*, 174,374 - 387,2006.
- [17] George J Klir and Bo Yuan, Fuzzy Sets and Fuzzy Logic ,Theory and Applications ,Prentice Hall P T R upper saddle river , New Jersey,1995.
- [18] Kaufmann, A., Introduction to the Theory of Fuzzy Subsets, Vol. I, Academic Press, New York,1975.
- [19] Ke.J.C, Lin.C.H, Fuzzy analysis of queueing systems with an unreliable server:A nonlinear programming approach, *Applied Mathematics and Computation*, 175, 330-346,2006.
- [20] Zimmermann H.J, Fuzzy set theory and its applications , 2nd ed,Kluwer-Nijhoff, Boston,1991.
- [21] Shanmugasundaram.S, Venkatesh.B, Multi Server Fuzzy Queueing model using DSW algorithm , *Global Journal of Pure and Applied Mathematics*, 11 (1),45-51,2015.